


Front view

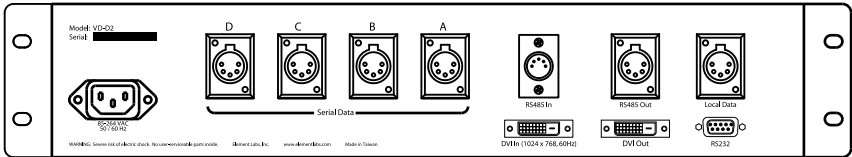

Rear view

Versa DRIVE D2 INFORMATION

PART NUMBER 103-0050-000

OVERVIEW The Versa DRIVE D2 receives live video via its DVI input and transmits the video data to Versa TILE and Versa TUBE systems.

PHYSICAL Dimensions

| | |
|--------|--------------------------------------|
| WIDTH | 1 standard rack unit (19.0" / 430mm) |
| HEIGHT | 2U (3.5" / 88.8mm) |
| DEPTH | 12" (304.8mm) |

Construction Anodized aluminum face, powder-coated steel chassis

Mounting Stand alone with plastic feet or rack mounted

CONNECTIONS Front Panel

- Power Switch
- LCD Display
- 4 control buttons - Menu, Up, Down, Enter

Rear Panel

- IEC - AC Power: 100-240 VAC 50/60Hz
- 4 x Serial Data output - for Versa TILE / TUBE
- 1 x Local Data output - for Versa TILE / TUBE
- RS485 input for pixel map download and daisy-chaining (5-pin XLR)
- RS485 output for daisy-chaining multiple D2 units together
- Serial connector for pixel map download
- DVI input
- DVI loop-out

FEATURES

- 8,192 pixel output on Serial Data (2,048 per output)
- 2,048 pixel output on Local Data
- 30 FPS (frames per second) output rate
- DVI input captures 1,024 x 768 60Hz display
- DVI loop-out allows for connection of DVI monitor or second Versa DRIVE D2 unit